

1060nm~1064nm 8W Fiber Coupled Laser Diode Module | Built-in TEC Cooler | 9-Pin HHL Package

1064nm 8W|9-PIN Package| 105um, 200um, 400um Fiber Core Optional | High Power LD | Built-in PD

WSLX-1064-008-M-H9-T-PD

Wavespectrum Laser Group

en.wavespectrum-laser.com.cn

PARAMETER	SYMBOL	VALUE	UNIT
Reverse Voltage	V_r	2.0	V
Operating Temperature	T_{op}	+10 ~ +30	°C
Storage Temperature	T_{stg}	-20 ~ +80	°C
Lead soldering temperature (10 sec.)	T_{is}	260	°C

Features:

- 1064nm
- Multimode Fiber
- 9-Pin Package
- Built-in TEC Cooler
- Built-in Photodiode

Applications:

- Medical Laser Treatment
- Others



Specifications	WSLX-1064-008-M-H9-T-PD		
	Min.	Type	Max.
Center Wavelength@25°C	1064nm ± 20nm		
Spectral Width (FWHM)	-----	4nm	-----
Output Power	7W	8W	-----
Temperature Coefficient of Wavelength	-----	0.3nm / °C	-----
Threshold Current (Typ.)	-----	0.5A	1.0A
Operating Current (Typ.)	-----	11.0A	12.0A
Operating Voltage	-----	1.7V	2.3V
Recommended Case Temperature	25°C		
TEC Max. Current	6A		
TEC Max. Voltage	9.8V		
Thermistor	10K		
Fiber Core Diameter	105um		
Fiber Numerical Aperture	0.22		
Fiber Length	>80cm		
Package Style	9-Pin		
Connector Type	SMA905 / ST / FC		


Wavespectrum Laser Group

www.wavespectrum-laser.com

sales@wavespectrum-laser.com



9-Pin Package View:

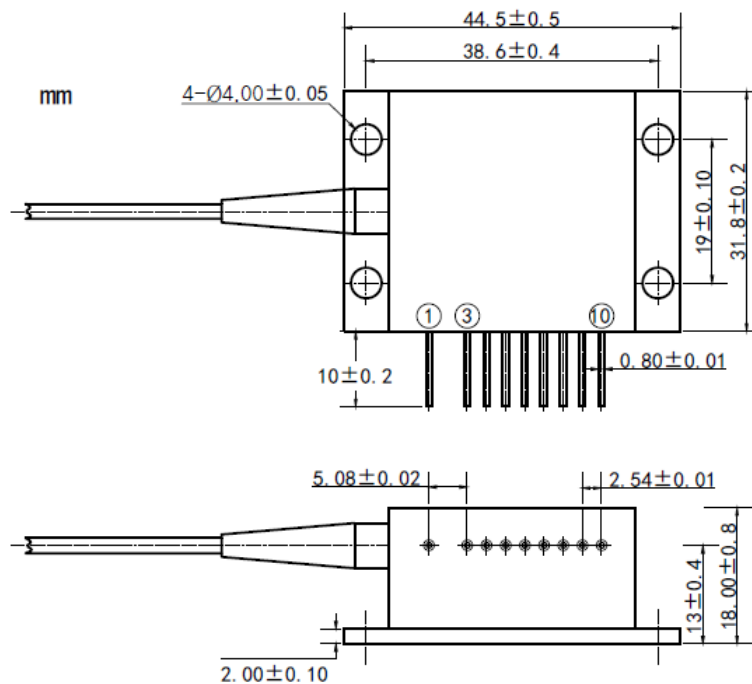

PIN	FUNCTION
1	TEC (-)
2	-
3	CASE
4	LD (+)
5	THERM
6	THERM
7	LD (-)
8	PD (P)
9	PD (N)
10	TEC (+)

Wavespectrum offer **Customized 1064nm Fiber Coupled LD.**

- Customized Output Power
- Customized Fiber Core
- Dual-Wavelength or Tri-Wavelength Module Optional (such as 2W@850nm+10W@1064nm)

Contact us with info@wavespectrum-laser.com

Electrically shorten LD module and store in non-extreme conditions.

Suggest using the constant current power supply.



Wavespectrum Laser Group
www.wavespectrum-laser.com
sales@wavespectrum-laser.com

