


445nm~450nm 10W Fiber Coupled Laser Diode (LD) Module with HHL Package | 450nm Blue Laser Module
440nm~455nm | 10W Output Power| With 200um Multi-mode Fiber| Built-in TEC Cooler Optional
WSLX-445-010-200M-H **Wavespectrum Laser Group** **www.wavespectrum-laser.com**


PARAMETER	SYMBOL	VALUE	UNIT
MAX Reverse Current	V_r	80	mA
Operating Temperature	T_{op}	0 ~ +60	°C
Storage Temperature	T_{stg}	-40 ~ +85	°C
Lead soldering temperature (10 sec.)	T_{is}	260	°C

Features: 450nm 10W Output Power - Built-in TEC Cooler Optional - Built-in Photodiode Optional - Stainless Steel Armor Optional	
Applications: - Medical Laser Treatment - Laser Show - Others	

Specifications	WSLX-445-010-200M-H		
	Min.	Type	Max.
Center Wavelength@25°C	450nm ±15nm		
Spectral Width (FWHM)	----	6nm	----
Output Power	----	10W	----
Temperature Coefficient of Wavelength	----	0.25nm / °C	----
Threshold Current (Typ.)	----	0.3A	0.5A
Operating Current (Typ.)	----	3.0A	3.3A
Operating Voltage	----	18V	22V
Fiber Core Diameter	200um		
Fiber Numerical Aperture	0.22		
Fiber Length	>80cm		
Connector Type	SMA905 / ST / FC		
Package	P4 Package		

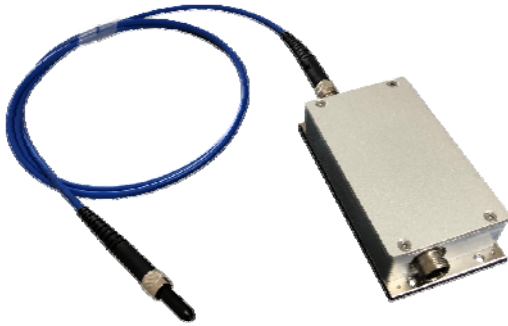

P4 Package View

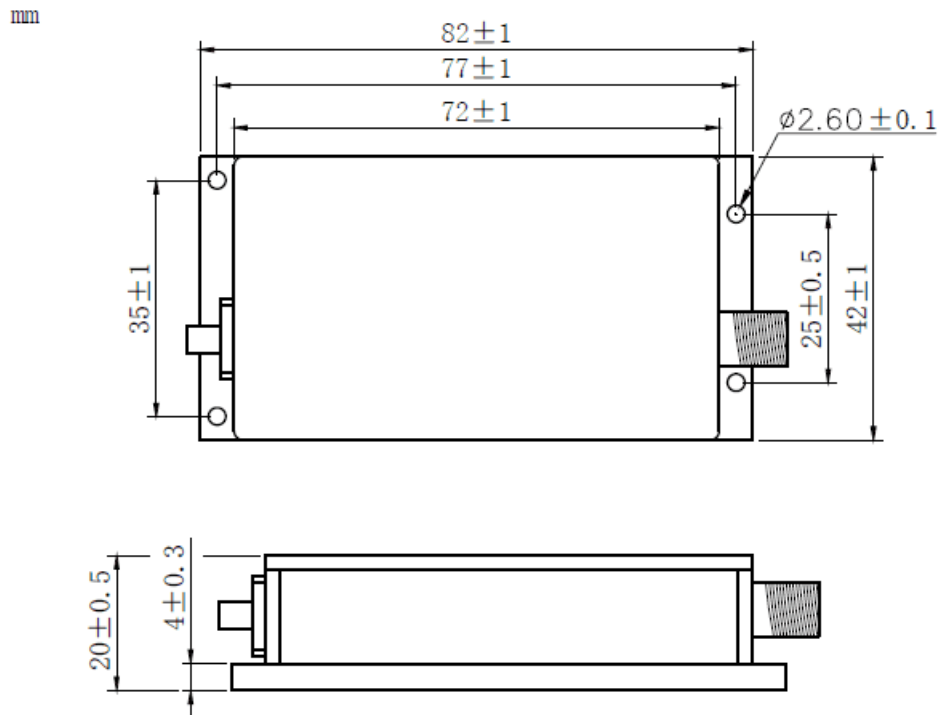

Wavespectrum offer **Customized** 445nm Fiber Coupled LD.

Please let me know your special request:

- Customized Output Power
- Customized Fiber
- Customized Fiber Connector

Contact us with info@wavespectrum-laser.com

Electrically shorten LD module and store in non-extreme conditions.

Suggest using the constant current power supply.



Wavespectrum Laser Group
www.wavespectrum-laser.com
sales@wavespectrum-laser.com

