


785nm 20mW PM Fiber Coupled Laser Diode with Coaxial Package | Infrared Laser Diode
780nm~785nm 20mW Coaxial Pigtailed LD with Polarization Maintaining Fiber (SM Fiber)
WSLP-785-020m-PM-PD **Wavespectrum Laser Group** **www.wavespectrum-laser.com**


785nm Pigtailed Diode Laser		20mW/PM Fiber		en.wavespectrum-laser.com.cn	
PARAMETER		SYMBOL	VALUE		UNIT
Reverse Voltage		V _r	2.0		V
Operating Temperature		T _{op}	-10 ~ +60		°C
Storage Temperature		T _{stg}	-40 ~ +85		°C
Lead soldering temperature (10 sec.)		T _{is}	260		°C
Features: 785nm PM Fiber High Reliability High Polarization Extinction Ratio					
Applications: Biological Instruments Analytical Equipment Others					
Specifications		WSLP-785-020m-PM-PD			
		Min	Type		Max
Center Wavelength@25°C		770nm	785nm		795nm
Recommended work Temperature		25°C			
Output Power		----	20mW		----
Fiber Type		Polarization Maintaining Fiber			
Fiber Core		5um			
Polarization Extinction Ratio		13dB	15dB		----
Monitor Current		----	0.3mA		----
Fiber Connector		FC/APC			
Fiber Length		>80cm			
Threshold Current (Typ.)		----	25mA		50mA
Operating Current (Typ.)		----	110mA		130mA
Operating Voltage		----	2.0V		2.5V
Package Style		Coaxial or B82			
High Polarization Extinction Ratio (PER) Version Laser Module is also available, please contact us.					




Coaxial Package View: (Part Number: WSLP-785-020m-PM-PD)

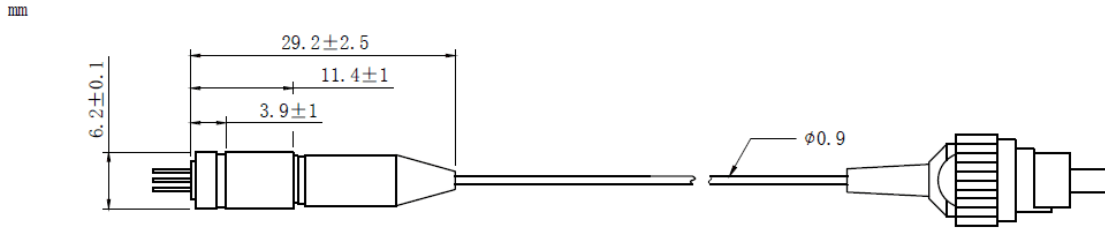

B82 Package View: (Part Number: WSLP-785-020m-PM-B-PD)

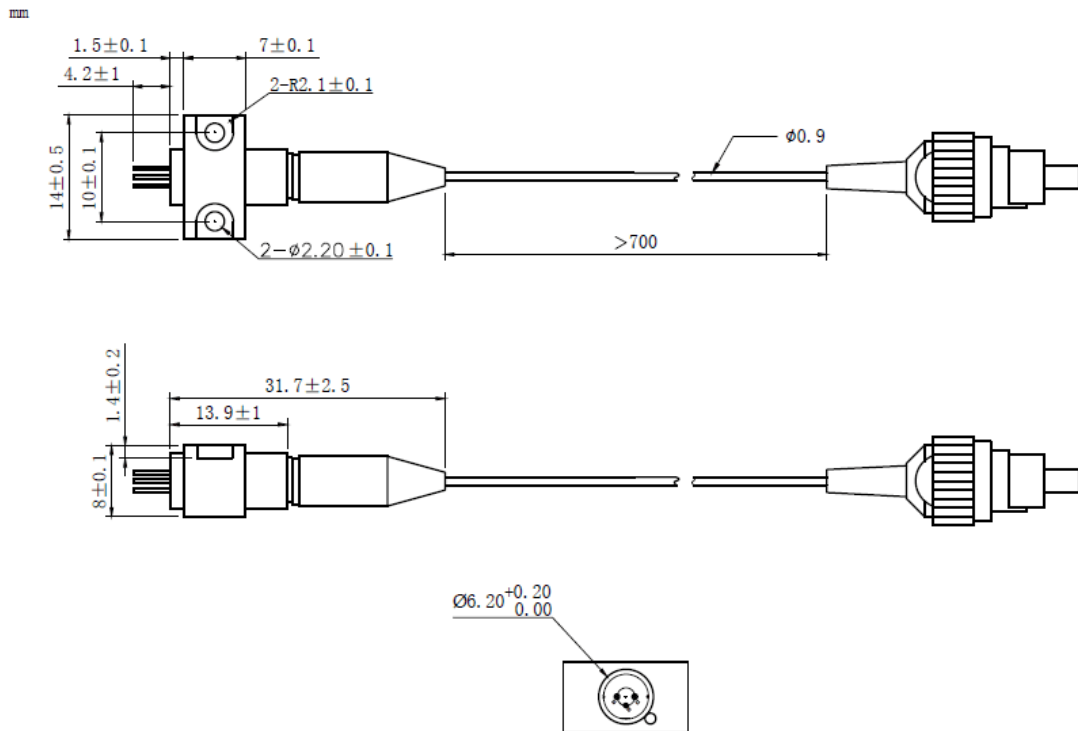

PIN Bottom View:



1	LD(-)
2	LD(+) & PD(-)
3	PD(+)



**Electrically shorten LD module and store in non-extreme conditions.
Suggest using the constant current power supply.**

